


Leaded Inductors for Class D

插件型数字功放电感

■ PD1521C Series

Features 特点

- Space reduction is realized by 2 in 1 construction.
二合一结构缩小空间
- The optimal design realizes high quality sound and low distortion.
高音质、低失真最佳设计
- Small compact, and DIP type.
小体积，直插类型
- Low radiation noise by magnetically shielded construction
闭合磁路封装，低辐射
- High current, Low resistance.
大电流，低电阻
- Operating temperature : -40°C~+125°C.
工作温度：-40°C~+125°C

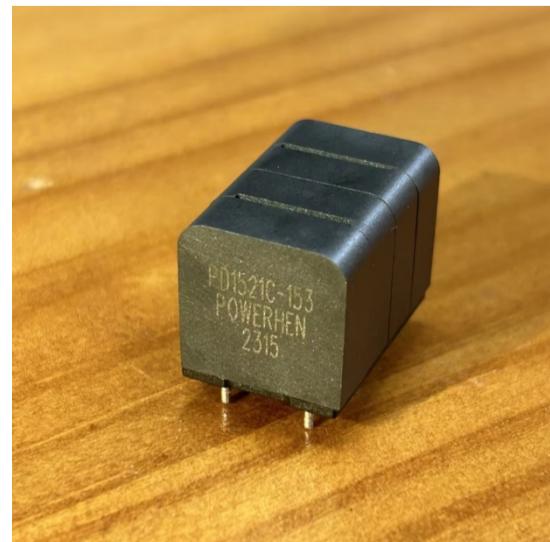

Applications 应用

- Suitable as choke for digital amp. Car audio, LCD and PDP TV, 5.1ch Home theater, etc.
适用于数字功放扼流。如汽车音响，LCD 电视和 PDP 电视，5.1 声道家庭影院等

Electrical characteristics 电气特性

| Part number 料号 | Inductance ① 电感量 $\mu\text{H} \pm 10\%$ | DCR ② 直流电阻 $\text{m}\Omega$ | | SRF ③ 自谐频率 MHz typical | Isat ④ 直流饱和电流 A typica | | | Irms ⑤ 温升电流 A typical | | |
|-------------------|--|--------------------------------|------|---------------------------------|------------------------------|----------|----------|-----------------------------|-----------|--|
| | | typ | max. | | 10% drop | 20% drop | 30% drop | 20°C rise | 40°C rise | |
| PD1521C-103KL | 10 | 8.2 | 11 | 14 | 16.2 | 17 | 17.4 | 7.5 | 9 | |
| PD1521C-153KL | 15 | 12 | 16 | 13 | 13.5 | 13.9 | 14.2 | 6.4 | 8 | |
| PD1521C-223KL | 22 | 18.3 | 25 | 9 | 10.6 | 11 | 11.3 | 5.2 | 7 | |

Remark

- ① Inductance is measured with a LCR meter Agilent 4284A or equivalent.
Test frequency at 100kHz
- ② DC resistance is measured with keithley 580 Milliohm Meter , or equivalent.
Reference ambient temperature 25°C
- ③ SRF measured using an Agilent 4395A network analyzer and an Agilent 16193A test fixture.
- ④ DC current at 25°C that causes the specified Inductance drop from its value without current.
- ⑤ Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- ⑥ Electrical specifications at 25°C



备注

- ①电感量测试采用 Agilent 4284A 数字电桥或同等仪器；
测试频率 100KHz
- ②直流电阻测试采用 keithley 580 毫欧表或同等仪器；
环境温度 25° C
- ③SRF 使用 Agilent 4395A 网络分析仪和 Agilent 16193A 测试夹具测量。
- ④直流电流在 25° C，加载导致指定电感从没有电流的值下降。
- ⑤导致指定温度从 25° C 环境温度上升的电流。此信息仅供参考，不代表绝对最大额定值。
- ⑥25° C 时的电气规格




ShenZhen Powerhen Electronic Co.,Ltd

Addr:Floor 3, Building 2, Shenliang Automotive Electronic Industrial Park, Guanlan Town, Shenzhen
Tel:0755-23570708 Fax:0755-28088656 E-Mail:sales@powerhen.com



Dimensions 结构尺寸

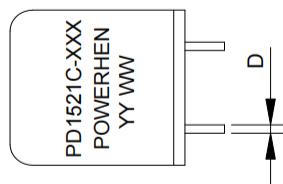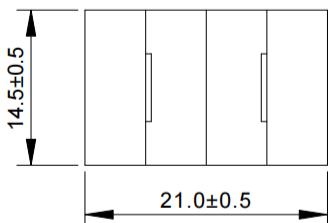

| Inductors | D |
|-----------|-----|
| 10μH | 0.9 |
| 15μH | 0.8 |
| 22μH | 0.7 |

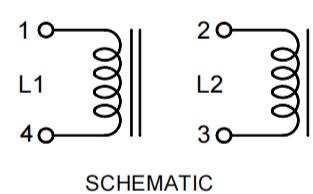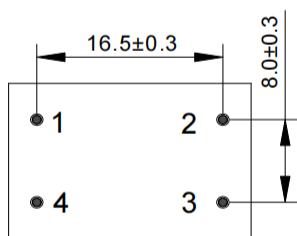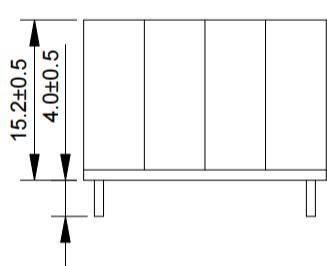


Electrical Characteristic Curve 电气特性曲线

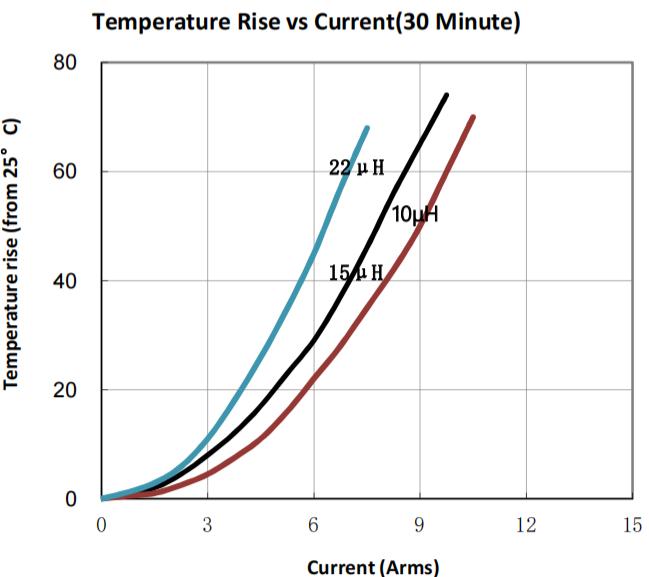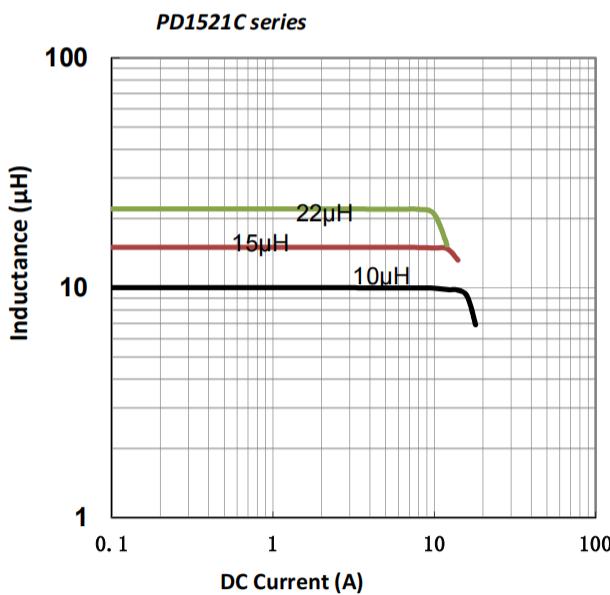

■ Packaging Specification - tray: [mm]

包装规格 - 托盘包装: [mm]

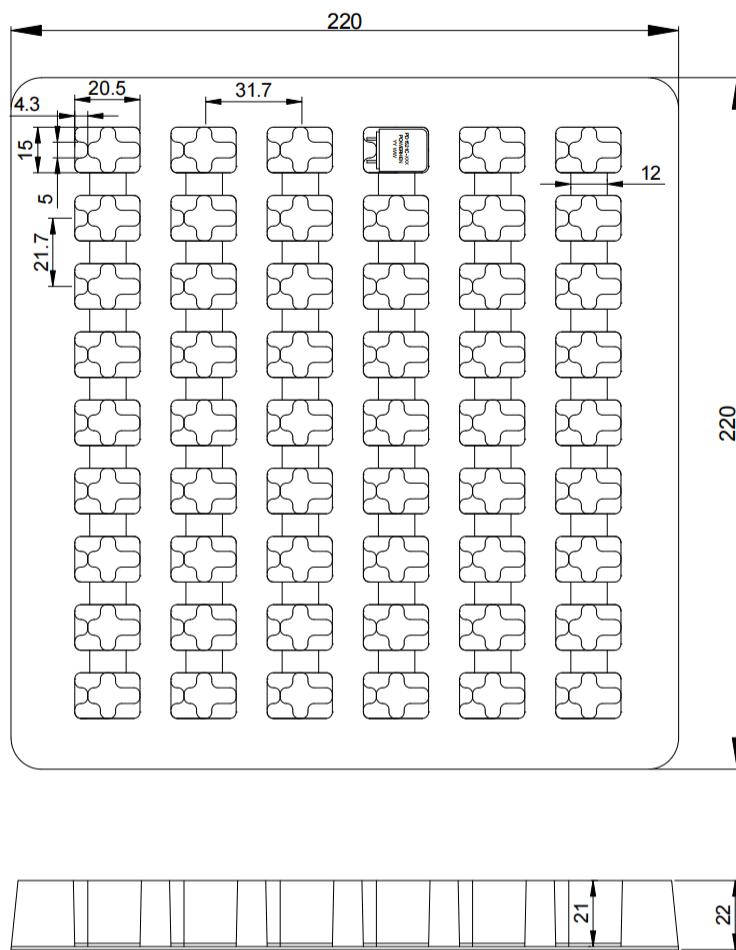

Weight 重量: 17.1~17.42g/PCS
Packaging 包装数量: 54 PCS/盘